



**The Timken Company**

4500 Mt Pleasant St. NW


N. Canton, OH 44720

**Phone:** (234) 262-3000

**E-Mail:** [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) (<mailto:CustomerCAD@timken.com>) • **Web site:** [www.timken.com](http://www.timken.com) (<http://www.timken.com>)

All Product Types > Bearings > Roller Bearings > Timken® Tapered Roller Bearings > Timken® Single Row Tapered Roller Bearing > Timken® Tapered Roller Bearings - Single Cones > Timken® Tapered Roller Bearings - Single Cones - Imperial (</viewitems/tapered-roller-bearings---single-cones/tapered-roller-bearings-single-cones-imperial>)

## Part Number 00050, Tapered Roller Bearings - Single Cones - Imperial

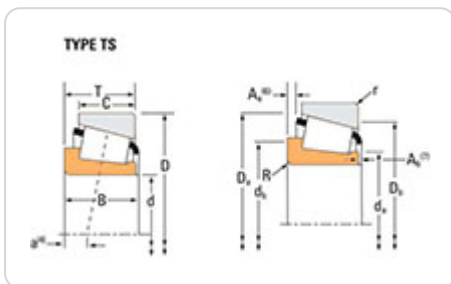

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

### Key Dimensions

Series	00000
Cone Part Number	00050

Bore (d)	1/2 in 12.7 mm
Dynamic Radial Load Rating - 90M Revs (C90) <sup>1</sup>	1220 lbf 5410 N
Dynamic Radial Load Rating - 1M Revs (C1) <sup>2</sup>	4690 lbf 20900 N
C1 - Dynamic Radial Rating (Two- Row, 1 million revolutions) <sup>3</sup>	8160 lbf 36300 N
Dynamic Radial Load Rating 2-Row - 90M Revs (C90-2row) <sup>4</sup>	2120 lbf 9410 N
K Factor <sup>5</sup>	2.12

## Other Dimensions

Inner Ring Width (B)	0.5540 in 14.072 mm
Max Shaft Fillet Radius <sup>6</sup>	0.060 in 1.5 mm
Shaft Backing Shoulder Diameter - Frontface (da)	0.65 in 16.5 mm
Shaft Backing Shoulder Diameter - Backface (db)	0.75 in 19 mm
Cage Location Relative to Frontface (Ab)	0.08 in 2 mm
Cage Location Relative to Backface (Aa)	-0.03 in -0.8 mm
Effective Center Location <sup>7</sup>	-0.2 in -5.1 mm
Weight	0.4 lb 0.183 Kg

## Ratings

Static Radial Load Rating (C0)	3840 lbf 17100 N
C <sub>a90</sub> - Dynamic Thrust Rating (90 million revolutions) <sup>8</sup>	574 lbf 2550 N

# Factors

Geometry Factor ( $C_g$ )<sup>9</sup>

0.033

<sup>1</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values.

<sup>2</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>3</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>4</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>5</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>6</sup> These maximum fillet radii will be cleared by the bearing corners.

<sup>7</sup> Negative value indicates effective center inside cone backface.

<sup>8</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>9</sup> Geometry constant for Lubrication Life Adjustment Factor  $a_3$ .