



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) (mailto:CustomerCAD@timken.com) • Web site: [www.timken.com](http://www.timken.com) (http://www.timken.com)

All Product Types > Bearings > Roller Bearings > Timken® Tapered Roller Bearings > Timken® Single Row Tapered Roller Bearing > Timken® Tapered Roller Bearings - Single Cones > Timken® Tapered Roller Bearings - Single Cones - Imperial (/viewitems/tapered-roller-bearings---single-cones/tapered-roller-bearings-single-cones-imperial)

## Part Number 02473, Tapered Roller Bearings - Single Cones - Imperial

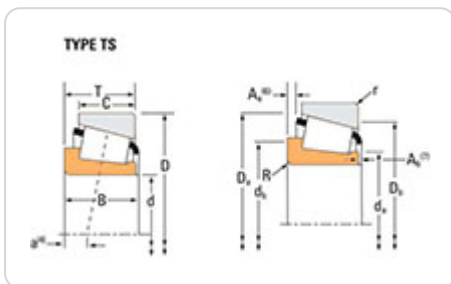

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

### Key Dimensions

|                  |           |
|------------------|-----------|
| Cone Part Number | 02473     |
| Bore (d)         | 1.0000 in |

25.400 mm

Dynamic Radial Load Rating - 90M  
Revs (C90) <sup>1</sup> 3720 lbf  
16500 N

Dynamic Radial Load Rating - 1M  
Revs (C1) <sup>2</sup> 14300 lbf  
63800 N

C1 - Dynamic Radial Rating (Two-  
Row, 1 million revolutions)<sup>3</sup> 25000 lbf  
111000 N

Dynamic Radial Load Rating 2-Row  
- 90M Revs (C90-2row) <sup>4</sup> 6470 lbf  
28800 N

K Factor <sup>5</sup> 1.4

## Other Dimensions

Inner Ring Width (B) 0.875 in  
22.225 mm

Max Shaft Fillet Radius<sup>6</sup> 0.03 in  
0.760 mm

Shaft Backing Shoulder Diameter -  
Frontface (da) 1.32 in  
33.5 mm

Shaft Backing Shoulder Diameter -  
Backface (db) 1.36 in  
34.5 mm

Cage Location Relative to Frontface  
(Ab) 0.06 in  
1.5 mm

Cage Location Relative to Backface  
(Aa) 0.03 in  
0.8 mm

Effective Center Location<sup>7</sup> -0.2 in  
-5.1 mm

Weight 0.9 lb  
0.40 Kg

## Ratings

Static Radial Load Rating (C0) 15800 lbf  
70200 N

C<sub>a90</sub> - Dynamic Thrust Rating (90  
million revolutions)<sup>8</sup> 2650 lbf  
11800 N

# Factors

---

|                                   |        |
|-----------------------------------|--------|
| G1 Factor                         | 17.5   |
| G2 Factor                         | 8.5    |
| Geometry Factor (Cg) <sup>9</sup> | 0.0681 |

<sup>1</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values.

<sup>2</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>3</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>4</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>5</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>6</sup> These maximum fillet radii will be cleared by the bearing corners.

<sup>7</sup> Negative value indicates effective center inside cone backface.

<sup>8</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>9</sup> Geometry constant for Lubrication Life Adjustment Factor  $a_3$ .