
The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com (mailto:CustomerCAD@timken.com) • **Web site:** www.timken.com (http://www.timken.com)

Part Number 32224, Tapered Roller Bearings - TS (Tapered Single) Metric



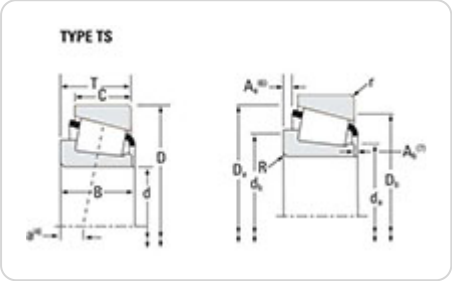

Key Features

- Available in single, double and multi-row configurations, as well as proprietary sizes
- Designed in collaboration with OE engineers to design, engineer and test bearings for premium performance in many applications
- Power dense designs allow for heavier loads and can help extend bearing life
- Optimized internal geometry lowers torque and operating temperatures to extend lubrication system life

- Can be designed to withstand high-corrosive, high-temperature and vacuum or low-lubrication environments with proprietary enhancements

Key Dimensions

Cone Part Number	X32224M
Cup Part Number	Y32224M
Bore (d)	120 mm 4.7244 in
O.D. (D)	215 mm 8.4646 in
Width (T)	61.500 mm 2.4213 in
Dynamic Radial Load Rating - 1M Revs (C1) [1]	586000 N 132000 lbf
Dynamic Radial Load Rating - 90M Revs (C90) [2]	152000 N 34100 lbf
e Factor [3]	0.44
K Factor [4]	1.34
Series	32224M
Y Factor [5]	1.38

Other Dimensions

Inner Ring Width (B)	58.000 mm 2.2835 in
Outer Ring Width (C)	50.000 mm 1.9685 in
Effective Center Location[6]	-10.2 mm -0.4 in
Max Shaft Fillet Radius[7]	3.050 mm 0.12 in
Max Housing Fillet Radius[8]	2.54 mm 0.1 in
Shaft Backing Shoulder Diameter - Frontface (da)	135 mm 5.31 in
Shaft Backing Shoulder Diameter - Backface (db)	147 mm 5.79 in
Housing Backing Shoulder Diameter - Frontface (Da)	204.98 mm 8.07 in
Housing Backing Shoulder Diameter - Backface (Db)	191.01 mm 7.52 in
Cage Location Relative to Backface (Aa)	5.3 mm 0.21 in
Cage Location Relative to Frontface (Ab)	5.6 mm 0.22 in
Weight	9.300 Kg 20.40 lb

Ratings

Dynamic Axial Rating - 90M Revs (Ca90)[9]	113000 N 25400 lbf
Static Radial Load Rating (C0)	831000 N 187000 lbf

Factors

G1 Factor	352
G2 Factor	68.1
Geometry Factor (Cg)[10]	0.121

[1] Based on 1 x 10^6 revolutions L_{10} life, for the ISO life calculation method.

[2] Based on 90 x 10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

[3] These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

[4] These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

[5] These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

[6] Negative value indicates effective center inside cone backface.

[7] These maximum fillet radii will be cleared by the bearing corners.

[8] These maximum fillet radii will be cleared by the bearing corners.

[9] Based on 90 x 10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

[10] Geometry constant for Lubrication Life Adjustment Factor a3l.