
The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com (mailto:CustomerCAD@timken.com) • **Web site:** www.timken.com (http://www.timken.com)

Part Number NCF2926VC3, Cylindrical Roller Radial Bearings - Full Complement



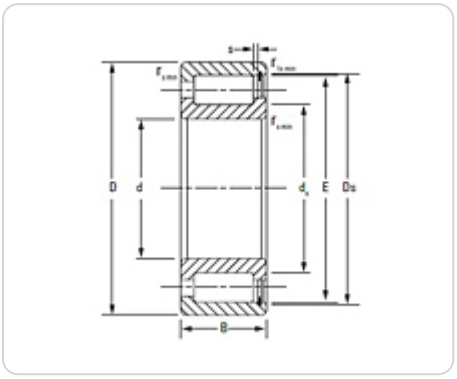

Key Features

- High radial load capacity
- Full-complement construction, no cage included
- Can manage axial loads in one direction and small axial displacement
- Sold as a completely unitized assembly
- Enhanced operational reliability due to optimized bearing design and reduced heat generation
- Long service life

Key Dimensions

Bore (d)	130 mm
O.D. (D)	180 mm 7.0866 in
Width (B)	1.1811 in 30 mm
Dynamic Radial Load Rating - 1M Revs (C1)[1]	225000 N 50600 lbf

Other Dimensions

Weight	2.3 Kg 5.00 lb
Shaft Backing Shoulder Dia.	140.8 mm 5.5400 in
Housing Backing Shoulder Dia.	167.5 mm 6.5900 in
Max Shaft Fillet Radius LF ID	0.040 in 1.1 mm
Max Shaft Fillet Radius RF ID	1.5 in 0.060 mm
Max Housing Fillet Radius LF OD	1.5 in 0.060 mm
Max Housing Fillet Radius RF OD	0.040 in 1.1 mm
DUR/DOR F/E	166.8 mm 6.5669 in
Permissible Axial Displacement (S3)[2]	2.00 mm 0.079 in

Ratings

Static Radial Load Rating (C0)	361000 N 81100 lbf
Thermal Reference Speed - Oil	1700 rpm
Thermal Reference Speed - Grease	1400 rpm

Factors

Geometry Factor (Cg)	0.160 0.1600 mm

[1] Based on 1 x 10^6 revolutions L_{10} life, for the ISO life calculation method.

[2] Permissible axial displacement from normal position of one bearing ring in relation to the other.