

The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com (mailto:CustomerCAD@timken.com) • **Web site:** www.timken.com (http://www.timken.com)

Part Number NJ2334EMAC3, Cylindrical Roller Radial Bearings - Single Row ISO

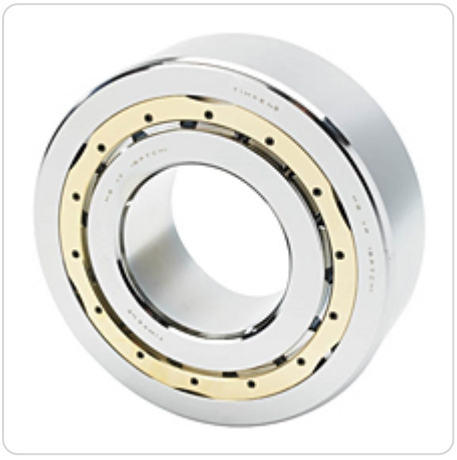

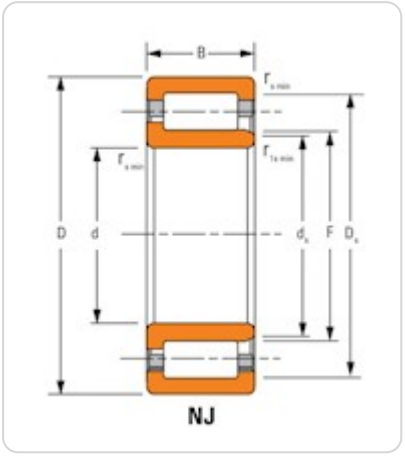

Key Features

- Supports heavy radial loads
- Low friction roller design allows for high speed applications
- Separable components simplify mounting and removal

- Design has two ribs on the outer ring and one rib on the inner ring, making type NJ bearings well suited for use as semi-locating bearings
- Enhanced operational reliability
- Long service life

Key Dimensions

Bore (d)	170 mm
O.D. (D)	360 mm 14.1732 in
Width (B)	4.7244 in 120 mm
Dynamic Radial Load Rating - 1M Revs (C1)[1]	1710000 N 385000 lbf

Other Dimensions

Weight	63 Kg 138.5 lb
Shaft Backing Shoulder Diameter	205.7 mm 8.1000 in
Housing Backing Shoulder Diameter	320 mm 12.6 in
Max Shaft Fillet Radius LF ID	4 in 0.160 mm
Max Shaft Fillet Radius RF ID	4 in 0.16 mm
Max Housing Fillet Radius LF OD	4 in 0.16 mm
Max Housing Fillet Radius RF OD	4 in 0.16 mm
Design Units	Metric
Type	NJ

Ratings

Static Radial Load Rating (C0)	2110000 N 474000 lbf
Thermal Reference Speed - Grease	1200 rpm
Thermal Reference Speed - Oil[2]	1300 rpm

Factors

Geometry Factor (Cg) [3]	0.15

[1] Based on 1 x 10^6 L_{10} life for the ISO life calculation method.

[2] See thermal speed ratings in the engineering section.

[3] Geometry constant for Lubrication Life Adjustment Factor a3l.